


# EB0020

## Relay mounting base


The EB0020 relay mounting base has been specially designed for use with conventional detectors from the IRIS series or addressable detectors from the ENEA series.

The relay base allows trouble-free connection of IRIS detectors to security panels (12Vdc) and other non-standard panels, or allows direct activation of external devices when connected to the "R" terminal of a detector from the ENEA series.

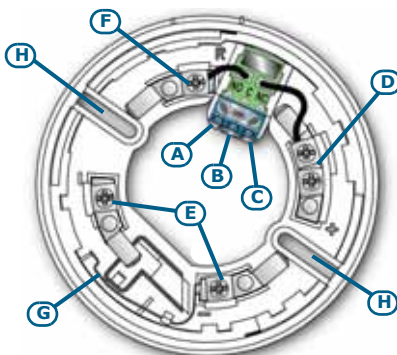


A	"NO" relay terminal
B	"C" relay terminal
C	"NC" relay terminal
D	"+" terminal
E	"-" terminals
F	"R" terminal
G	Short-circuit reed
H	Screw locations

Connecting an IRIS detector to a burglar control panel:

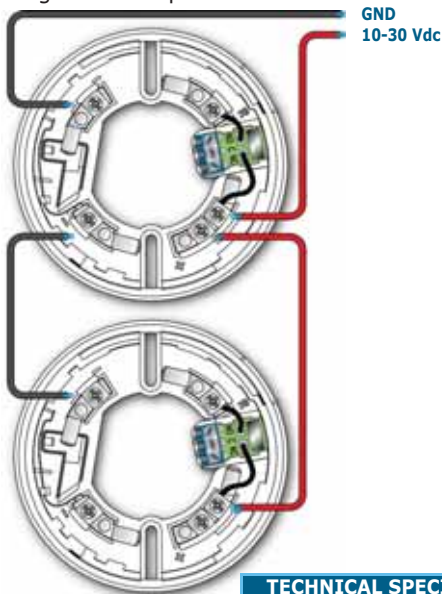

Connecting an ENEA detector to an analogue control panel:

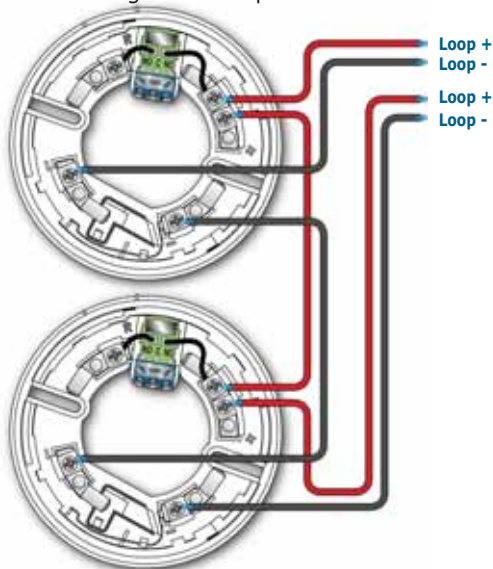

TECHNICAL SPECIFICATIONS	EB0020
Power supply	10-30 Vdc
Average current draw in alarm	14mA
Operating temperature	-5°C / +40°C
Humidity (without condensation)	95% RH
Diameter	110 mm
Height	24 mm
Weight	15 g

INIM Electronics reserves the right to change the technical specifications of this product without prior notice.

**INIM Electronics s.r.l.**  
**via Fosso Antico, Centobuchi**  
**63033, Monteprandone, (AP) Italy**  
**Tel. +39 0735 70 50 07**  
**Fax + 39 0735 70 49 12**  
**www.inim.biz info@inim.biz**