

SC-41-0200-0001-99


SmartCell Dual Input/Output Device for Fire Zones

Overview

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

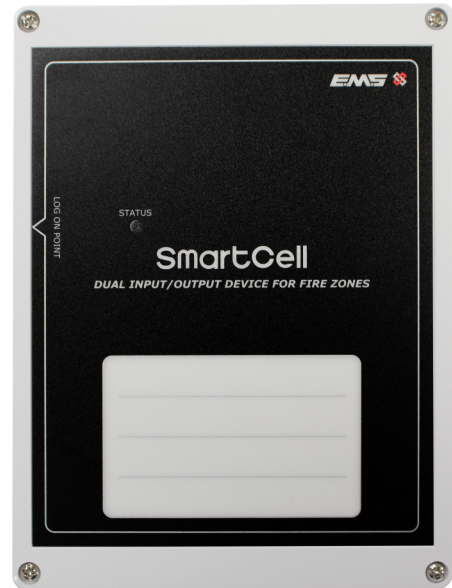

Details

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

SC-41-0200-0001-99

SmartCell Dual Input/Output Device for Fire Zones

Technical specifications

General

Wireless frequency	868 MHz
--------------------	---------

Input

Input quantity	2
Input type and rating	Resistor monitored inputs

Output

Output quantity	2
Output type and rating	Voltage free outputs, rated 1 A at 30 VDC

Physical

Physical dimensions	150 x 200 x 55 mm (W x H x D)
Net weight	0.45 kg
Mounting type	Wall mount
Batteries	3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)

Environmental

Operating temperature	-10 to +55°C
Storage temperature	-10 to +30°C (with batteries) -10 to +55°C (without batteries)
Relative humidity	95% noncondensing max.
Environment	Indoor

Standards & regulation

Compliance	CE
Certification	CPR
Standards	EN54-13 EN54-18 EN54-25

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 25 February 2020 - 12:37



**United
Technologies**

Climate | Controls | Security