

DM3110R-KIT

3000 Series intelligent addressable manual call point with isolator and back box

Product overview

The DM3100 Series is an intelligent range of addressable manual call points with integrated isolation. The DM3110R-KIT is a red, single action indoor MCP with a House-on-Fire functional indicator. It is delivered complete with back box, resettable element, test connector and test key. Multiple optional accessories are available to facilitate most indoor installation requirements.

Aesthetics

This single action MCP is a standard profile, indoor MCP suitable for surface and recess mount installations using standard or legacy European electrical boxes. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view in a passage installation. The clean face of the MCP is further enhanced by a front access & test key facility that allows access to the back box and cabling, making additional fastening screw holes obsolete.

Installation & maintenance friendly

The front facing access for an aesthetically matching test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover without the need for additional tools.

Compatibility

The DM3000 range may be used on compatible Aritech fire systems. They can in many cases be deployed into existing systems without CIE configuration changes.



Details

- Reliable single action manual call point for surface mounting
- Integrated short circuit isolation for added safety
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or frangible element
- Unobtrusive front facing test facility
- Standard mounting options facilitates easy retrofitting to existing installations
- Back box with rear, top and bottom cable entry
- Screen connection terminal in the back box for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Up to 128 devices supported per loop

DM3110R-KIT

3000 Series intelligent addressable manual call point with isolator and back box

Technische specificaties

General

Status indication	Dual LEDs, Alarm (red constant), Isolated (yellow constant), Fault (yellow blinking), Communication (green blinking)
User interface	LEDs, alarm flag
Compatibility	Aritech fire systems
Connectivity	2-wire loop
Addressing method	DIP Switches

Electrical

Power supply type	Lus aangedreven
Operating voltage	17 to 38 VDC
Current consumption	200 μ A (quiescent) 2.8 mA (alarm)
Cable specification	0.404 to 2.05 mm (0.13 to 3.31 mm ²)
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)

Detection

Detection principle	Push button/switch
Monitoring	Activated, Fault, Off, Short circuit
Response time	< 3 s
Installation height	Determined by local regulation

Isolation

Type	Negative line break
Quantity per loop	≤ 128
Isolation voltage	14 to 15.5 VDC
Reconnect voltage	14 to 15.5 VDC
Loop current	1 A (Continuous)
Switch current	1 A (Pulsed)
Leakage current	<1 mA
Series resistance	<0.06 Ω
Impedance requirements	<32 devices between isolators

Physical


Physical dimensions	87 × 87 × 26 mm (without back box) 87 × 87 × 57 mm (with back box)
Net weight	110 g (without back box) 165 g (with back box)
Colour	Rood (RAL 3028)
Mounting type	Achterbak, Verzonken montage, Muurmontage
Material (body)	Vlamvertragend ABS
Functional marking	House on Fire

Environmental

Vandal proof	No
Operating temperature	-25 to +72 °C
Storage temperature	-25 to +72 °C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP41

Regulatory

Compliance	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54:11, EN54:17

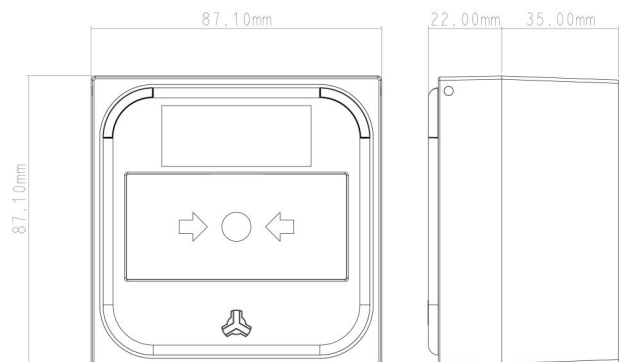

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 26 June 2023 - 12:16