ЛЛХ

Superior product line

HomeSiren S Jeweller

Wireless siren with external LED connector.



SSF

GRADE

EN 50131

PD 6662

2017

INCERT

NFA2P

What's new


Baseline HomeSiren Jeweller	Superior HomeSiren S Jeweller	
SmartBracket mounting panel without holding screw	SmartBracket mounting panel with holding screw	
Common battery	Enhanced battery	
Available for all PROs	Available only for accredited partners	

This is the device of the **Superior product line**. Superior products are advanced versions of Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.



The siren responds to tamper and security system alarms in less than a second. It is loud enough to scare away intruders and attract the attention of neighbours.

The siren LED notifies that the system is armed or disarmed, and a sound signal indicates delay when entering/leaving. These are helpful features for users who control the security system with a keypad or key fob.

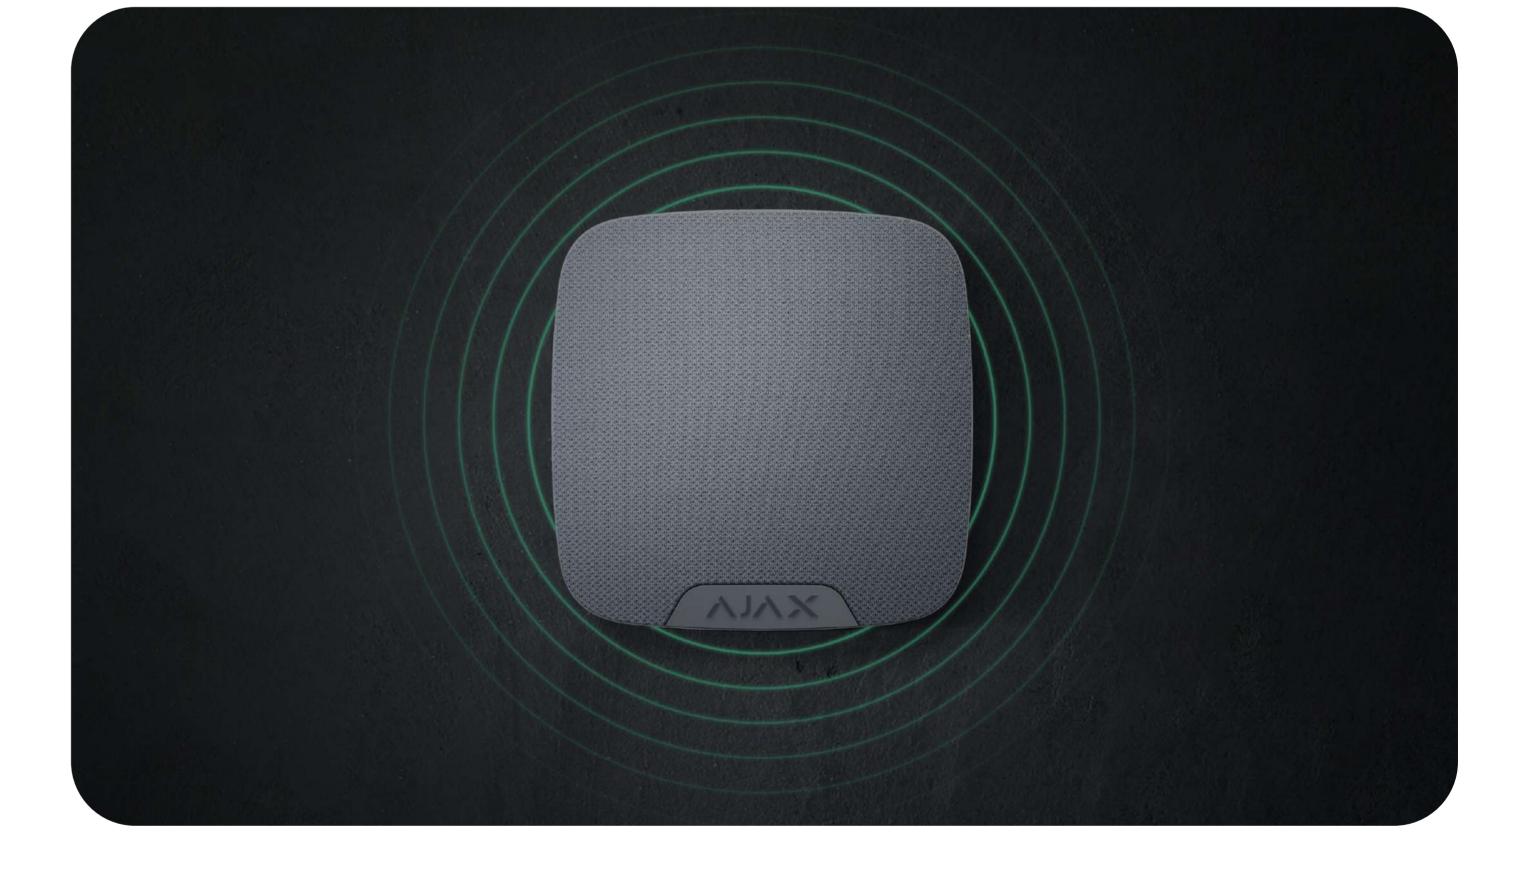





- Radio communication at a distance of up to 2,000 m in an open space
- Encryption and device authentication to prevent spoofing
- Regular polling to display current statuses of the devices
- Alarms of the system's devices
- Security status: armed/disarmed
- Door opening (Chime function)
- After-alarm indication



- Up to 5 years of battery life
- Low battery notifications
- Panasonic pre-installed battery



- Pairing with a hub via QR code
- Remote control and configuration in the app
- Effortless installation and replacement

Intended certifications	Communication with control panel	Alerts	Features
EN 50131 (Grade 2)	Jeweller communication	Alarms	Types of notifications
PD 6662:2017 INCERT	technology	Acoustic	Acoustic, LED
NFA2P	Frequency bands	Delay When Entering/Leaving	Alarm volume
SSF	868,0 — 868,6 MHz	Acoustic	from 81 to 105 dB
			at a distance of 1 m
Compatibility	Communication range	Security mode change	Alarma duratian
Hubs	up to 2,000 m In an open space	Acoustic, LED	Alarm duration from 3 s to 3 min
Hub Plus, Hub 2 (2G), Hub 2 (4G),	in an open opdee	Security status	
Hub 2 Plus, Hub Hybrid (2G),		LED	Piezoelectric buzzer
Hub Hybrid (4G)			frequency
		Door opening (Chime function)	3.5 ± 0.5 kHz
Range extenders		Acoustic	Additional LED connection
ReX, ReX 2		After-alarm indication	Available, 3 V==
		LED	
Power supply	Installation	Enclosure	Complete set
Battery	Operating temperature range	Colour	HomeSiren S Jeweller
2 × CR123A	from -10°C to +40°C	white, black	SmartBracket panel with holding screw
Battery life	Operating humidity	Dimensions	2 × CR123A batteries
up to 5 years	up to 75%	75 × 76 × 27 mm	(pre-installed)
Appufacturar	Drotaction alogs	M_{aiab}	Connector for third-party LED
Manufacturer Panasonic	Protection class IP50	Weight 93 g	Installation kit Quick start guide



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/homesiren-s/

support@ajax.systems

- AjaxSystemsSupport_Bot
- ajax.systems