



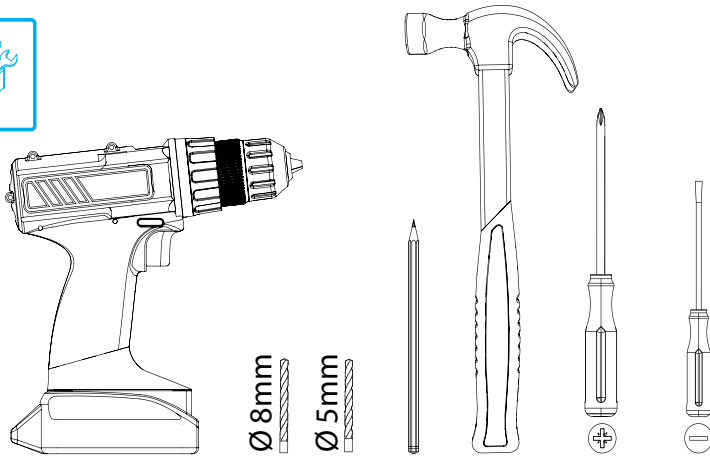
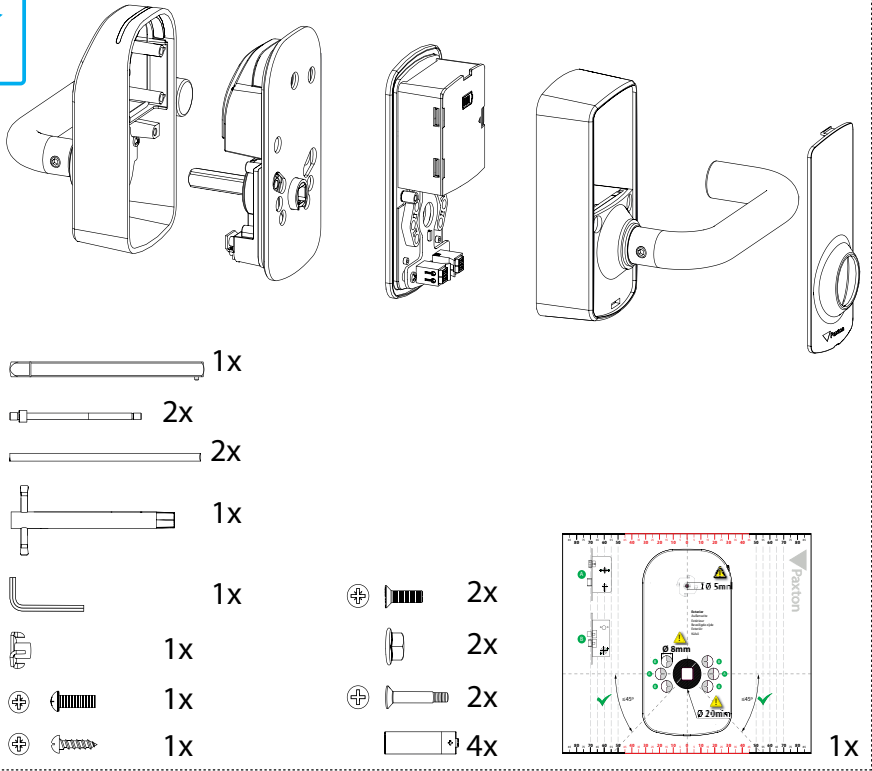





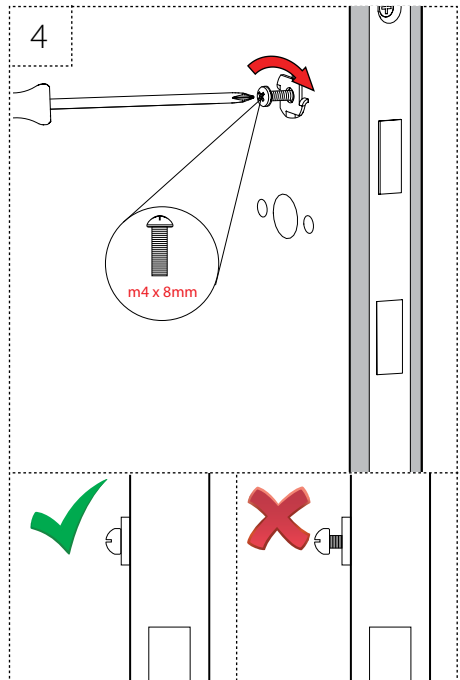






ins-01025

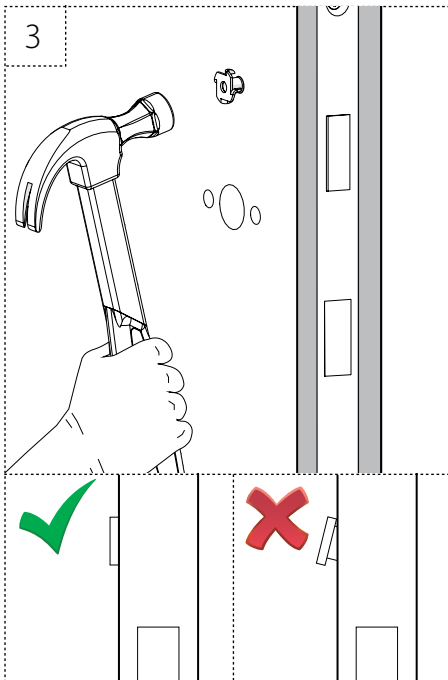

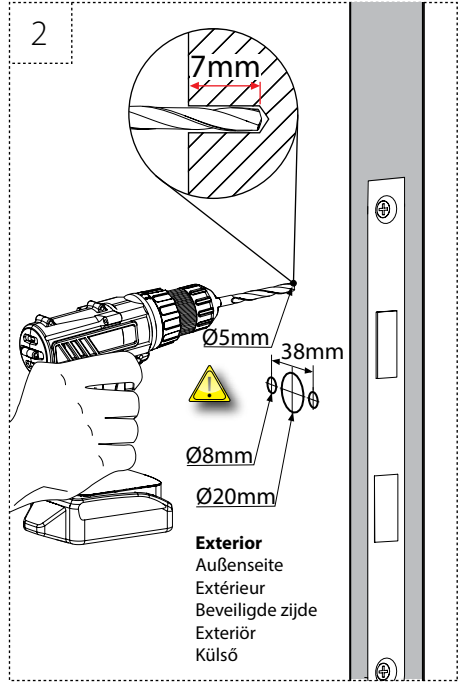

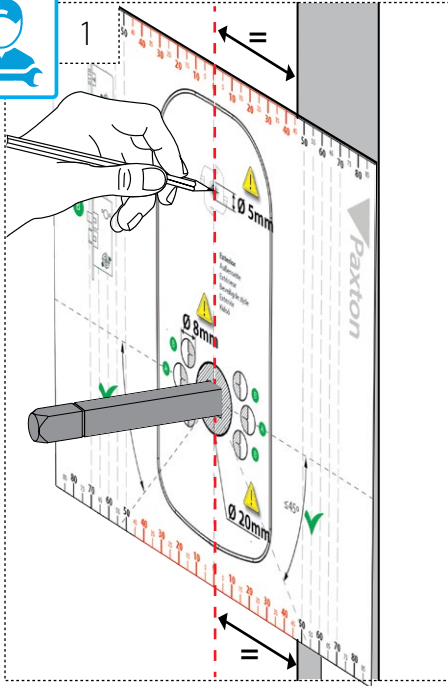

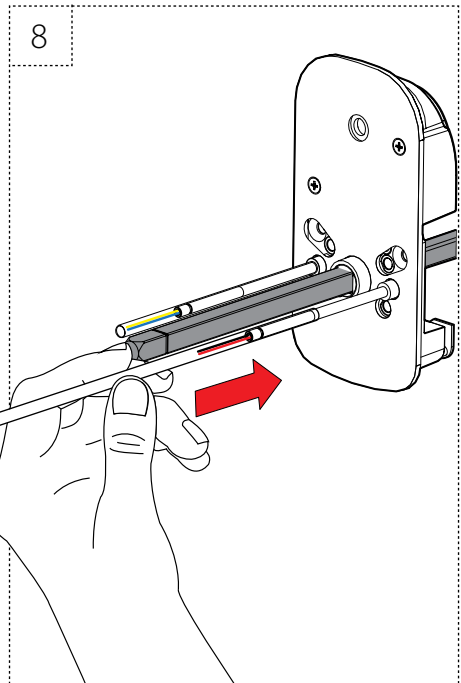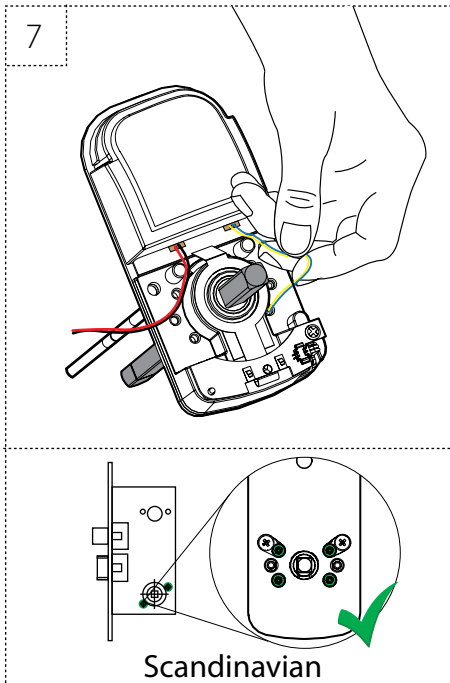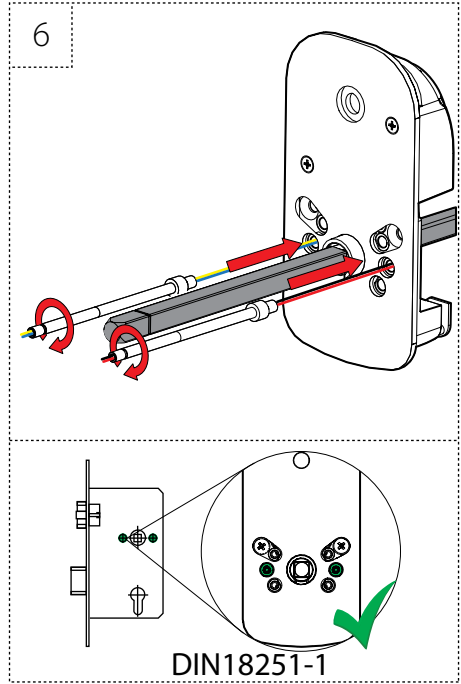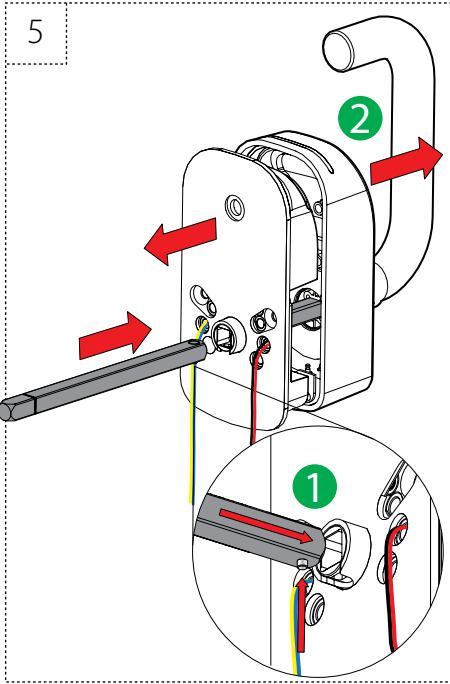

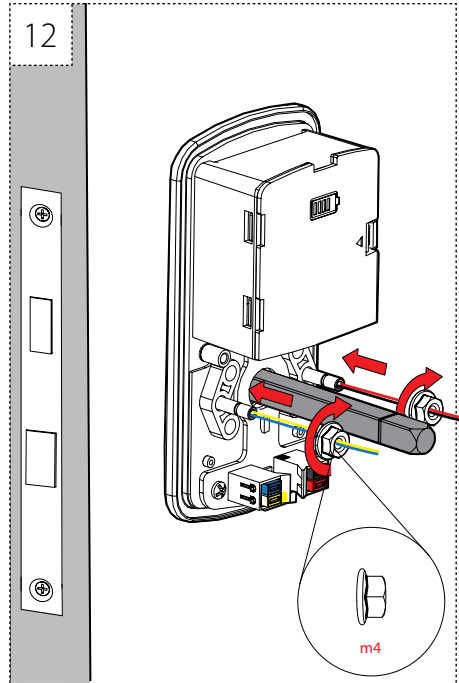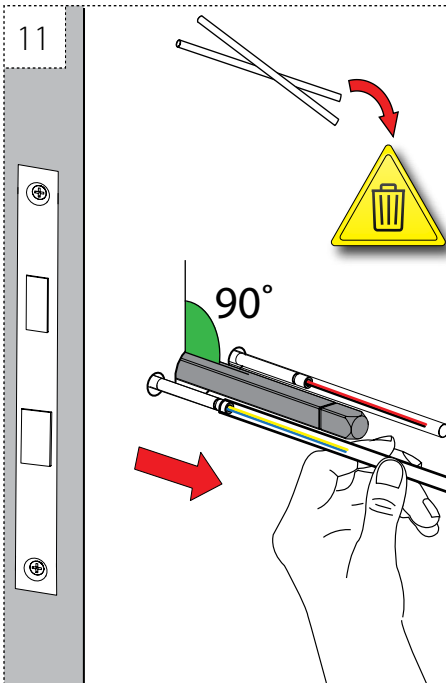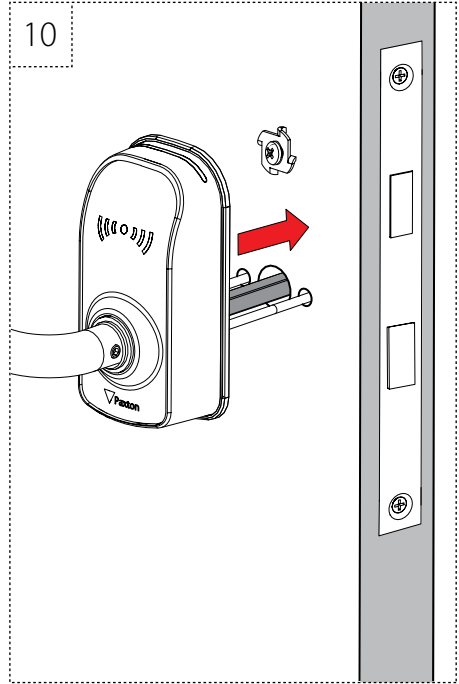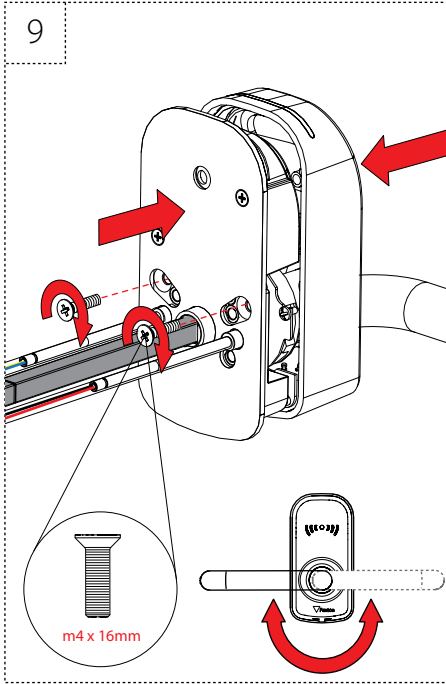

13

-Don't over tighten
 -ne pas trop serrer
 -niet te strak trekken
 -Nicht zu eng anziehen
 -No sobreajuste
 -Dra inte ät för hårt
 -Draai niet te vast
 -Não aperte demasiado
 -Ne húzza meg túlságosan
 -Undlad at overspænde

14


m6 x 16mm

15


1 2

16


17

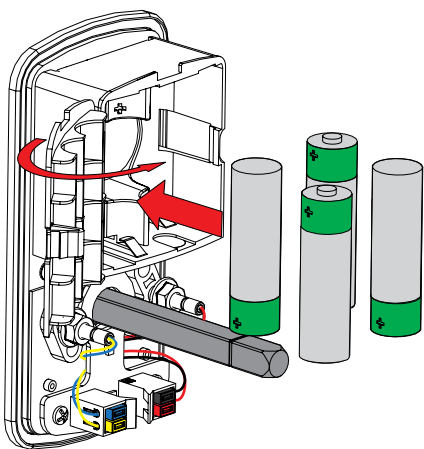


18




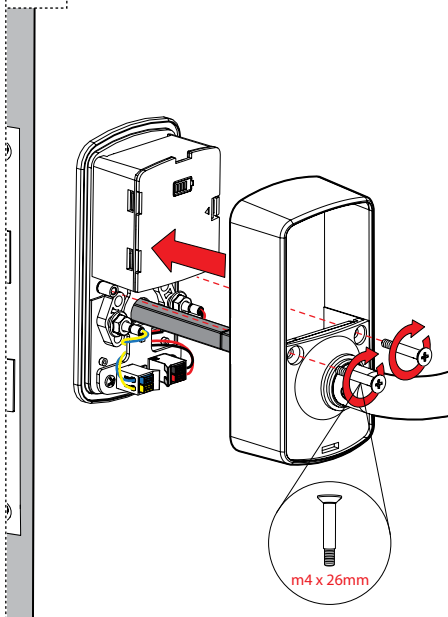




19


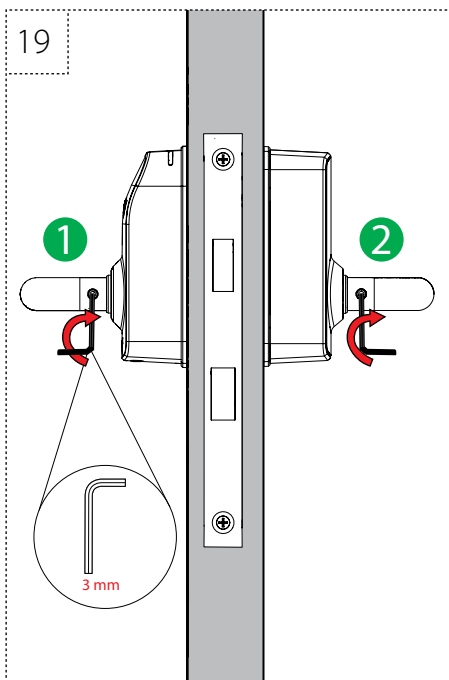


20

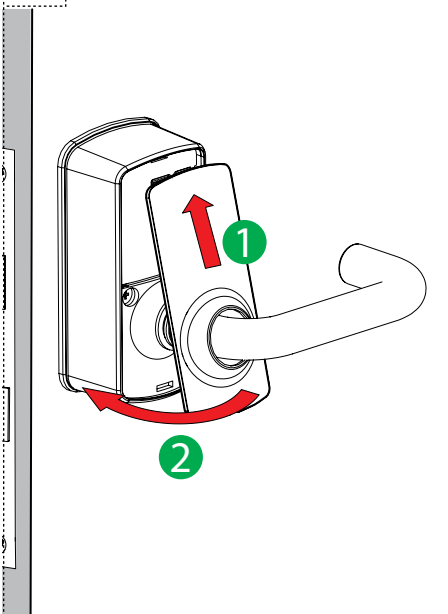

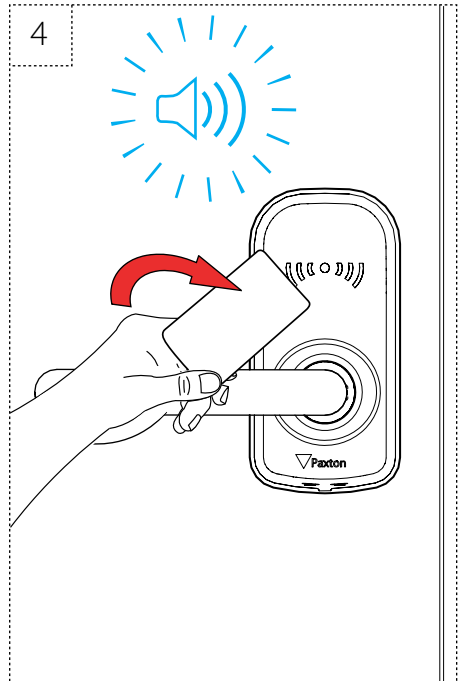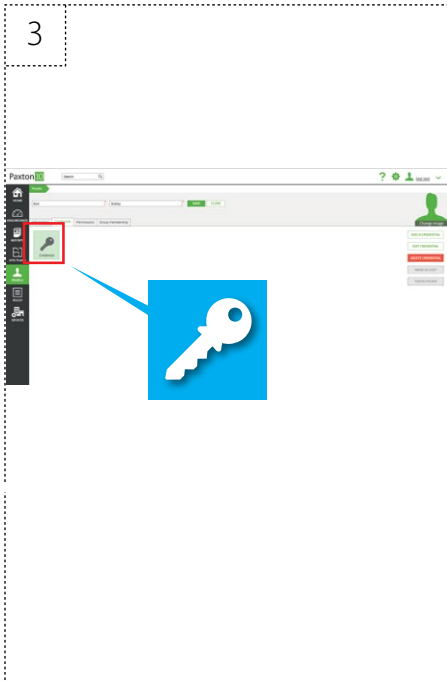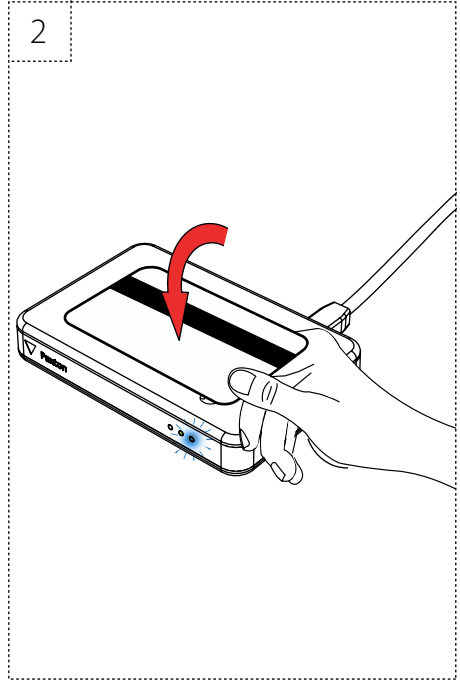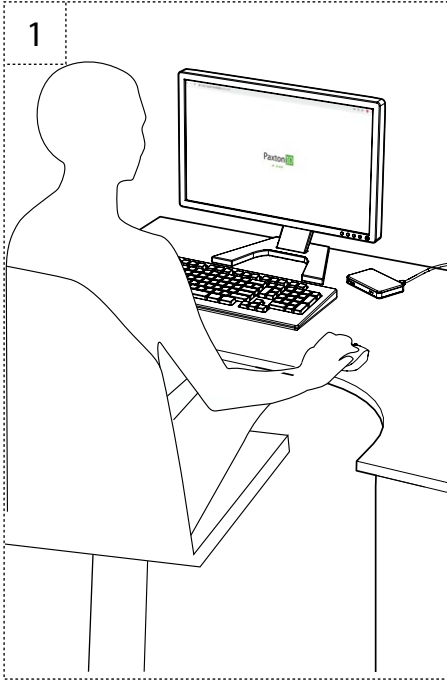


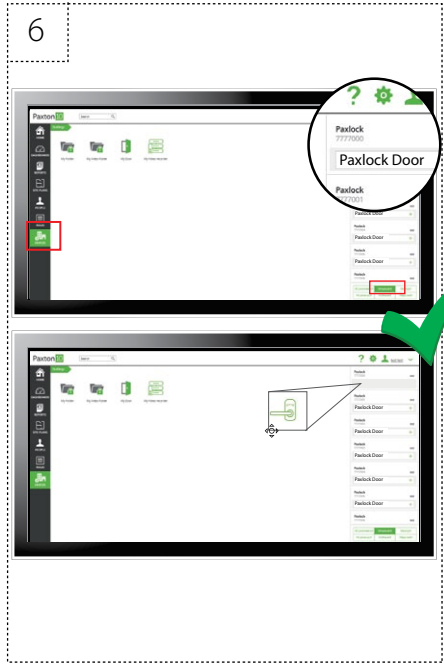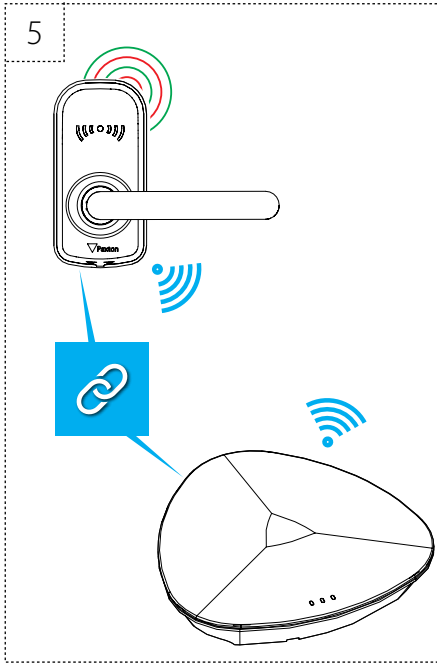

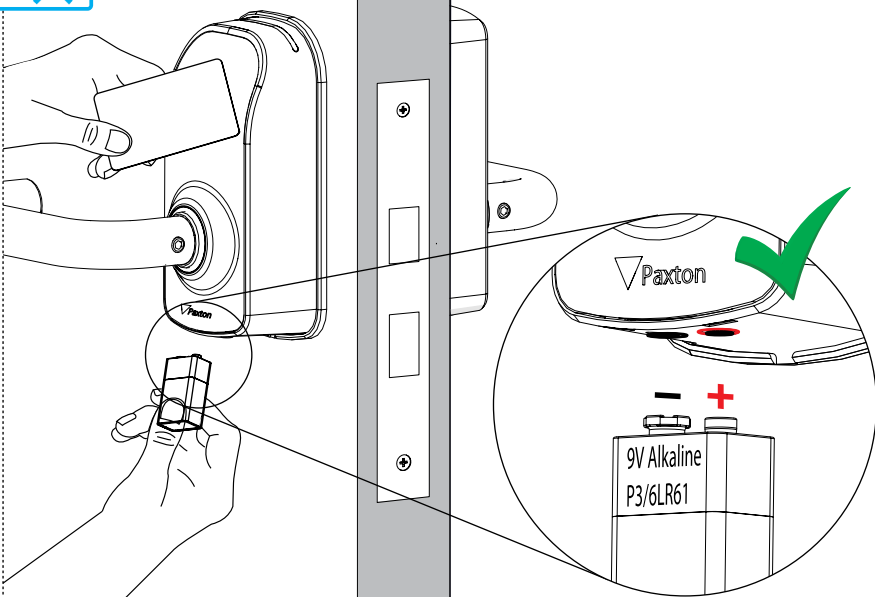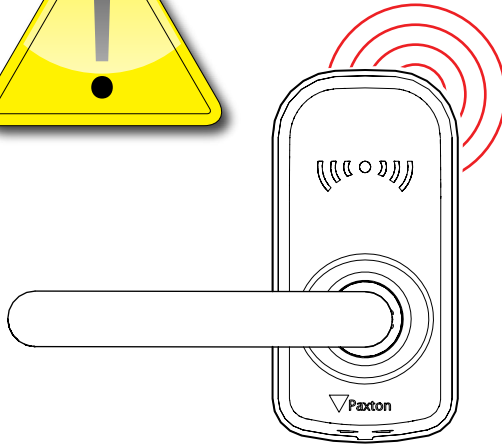





1

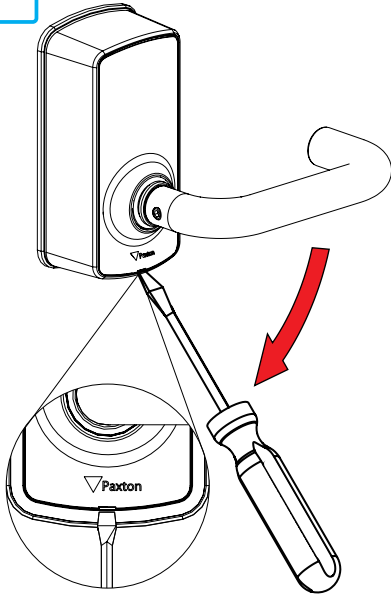


2

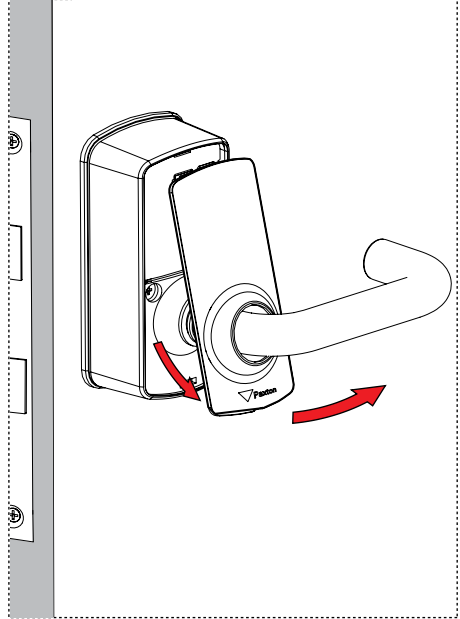


3

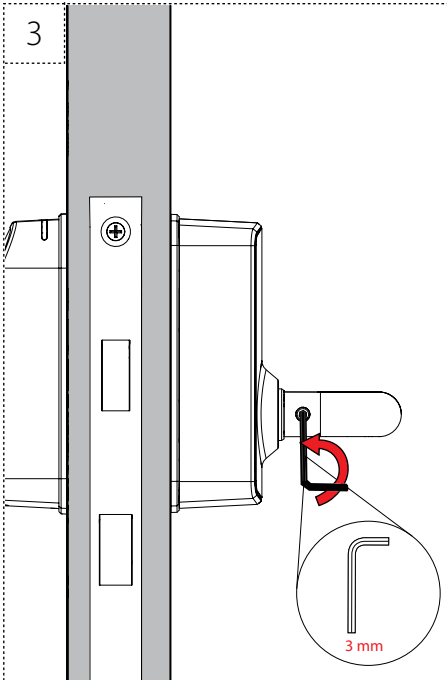


4

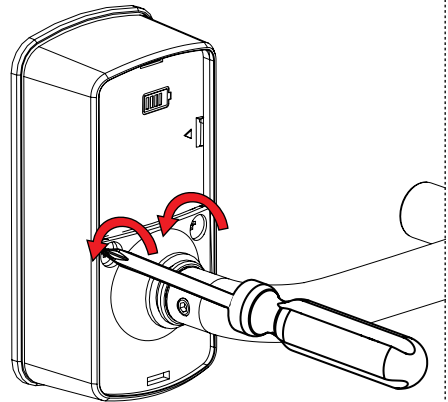

5

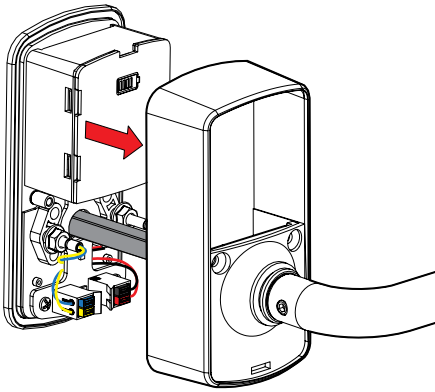


6

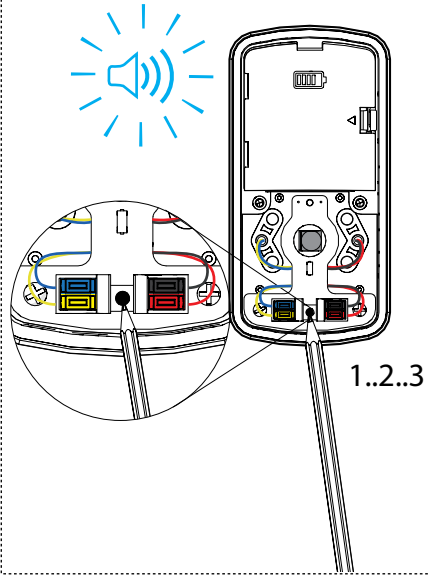





1

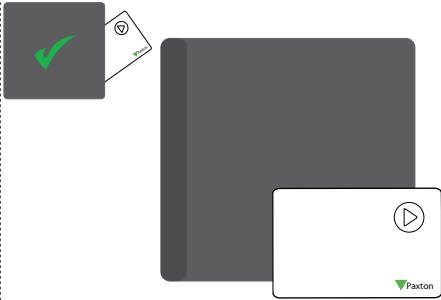


2

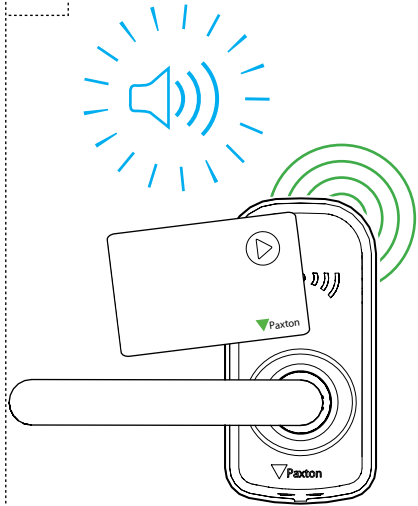


3

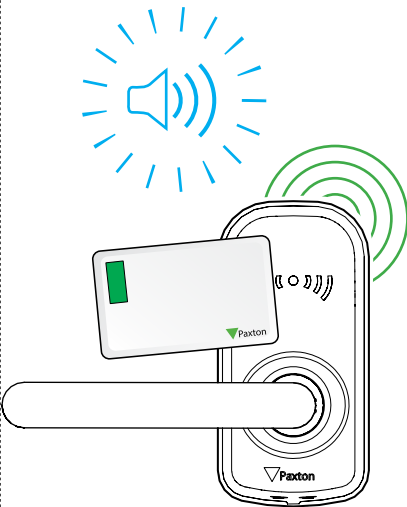


4

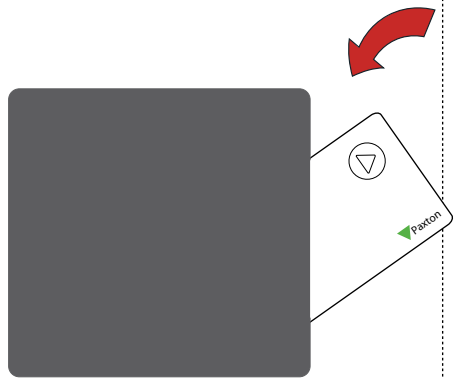


5

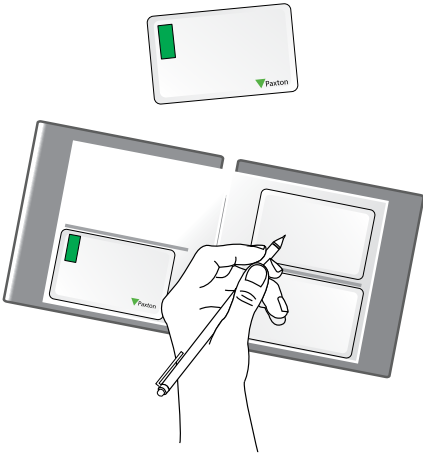


6




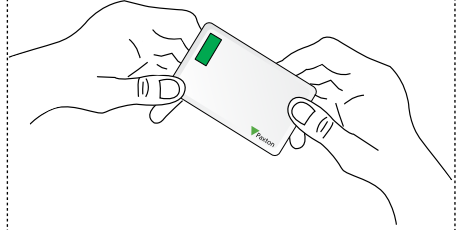


1

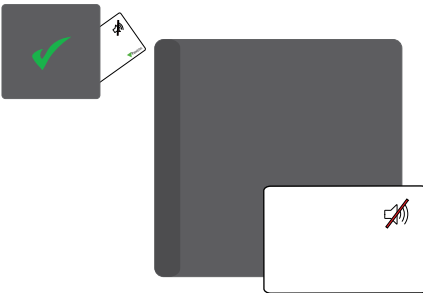


2

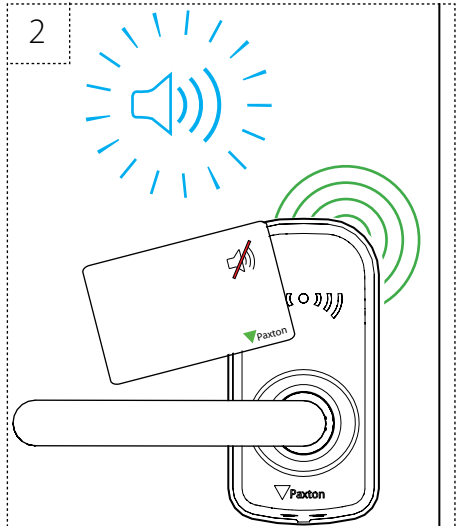

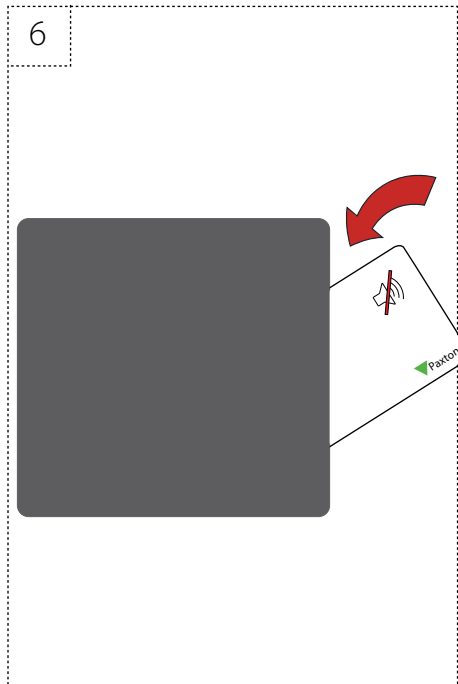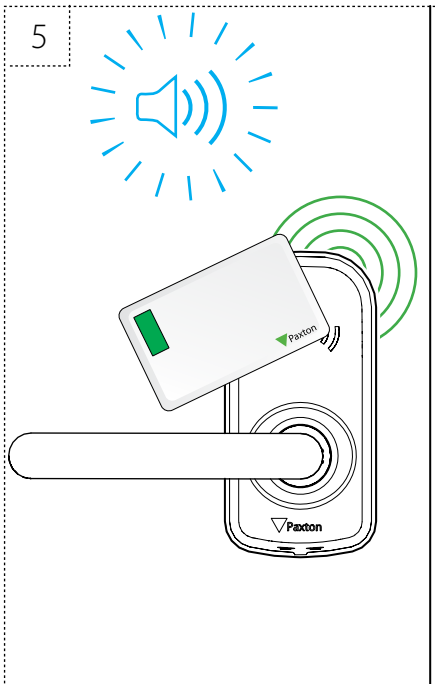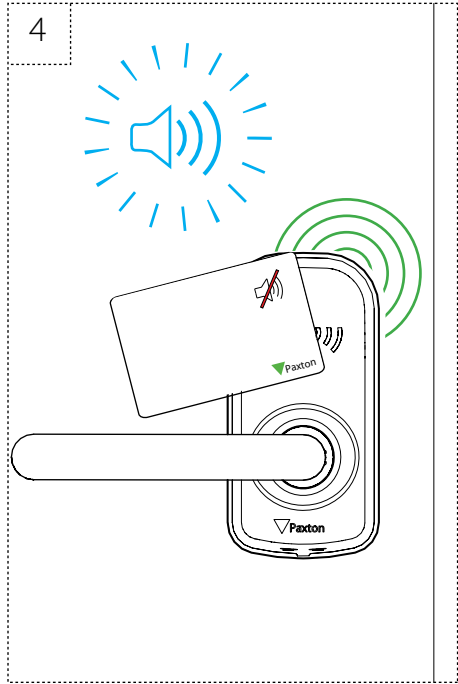
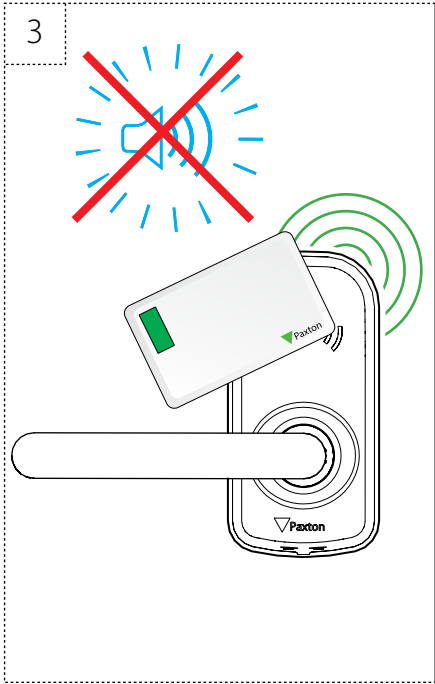





1

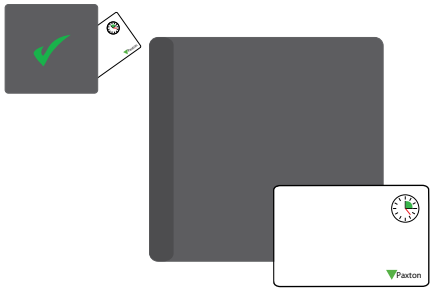


2

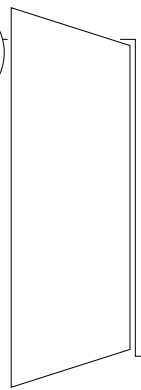


3

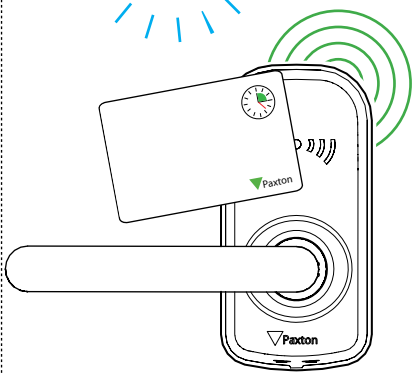


4

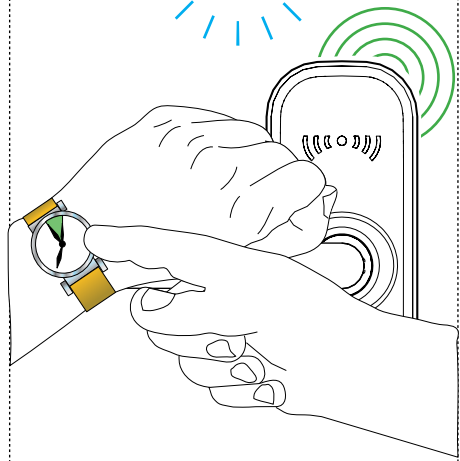


5

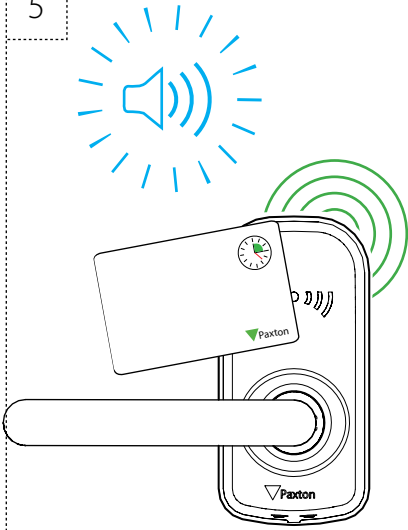


6

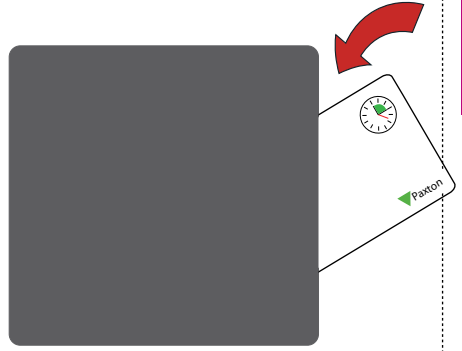

Standalone

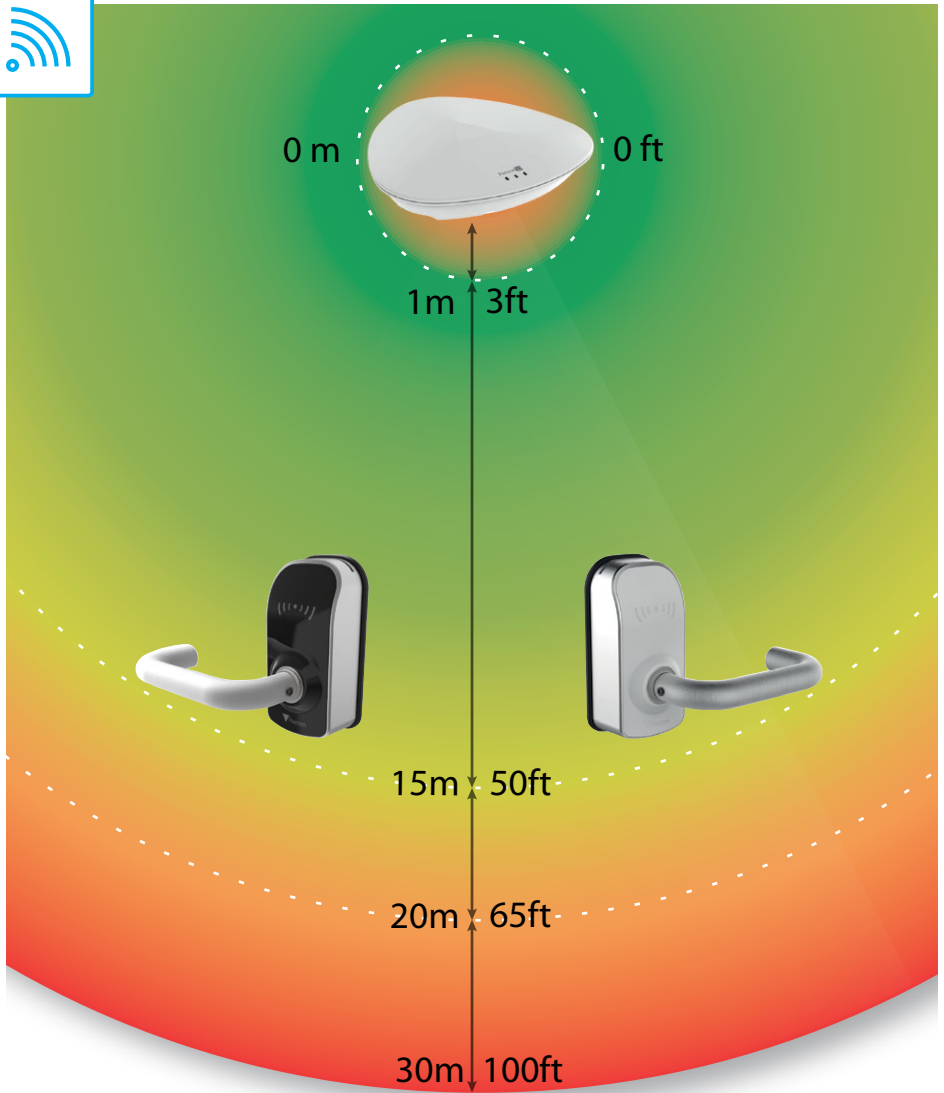





≤ 50000




Bluetooth®
low energy technology




-20°C +55°C
-4°F +131°F




-0°C +49°C
-32°F +120°F




≤ 10 mm




4 x AA Alkaline




3m - 15m
10 ft - 65 ft



35 - 60 mm



6V
800mA

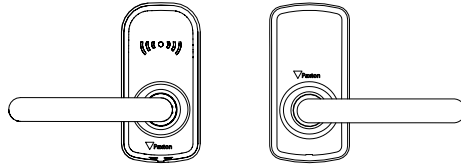

010-602WT



010-602BL




010-603WT




010-603BL



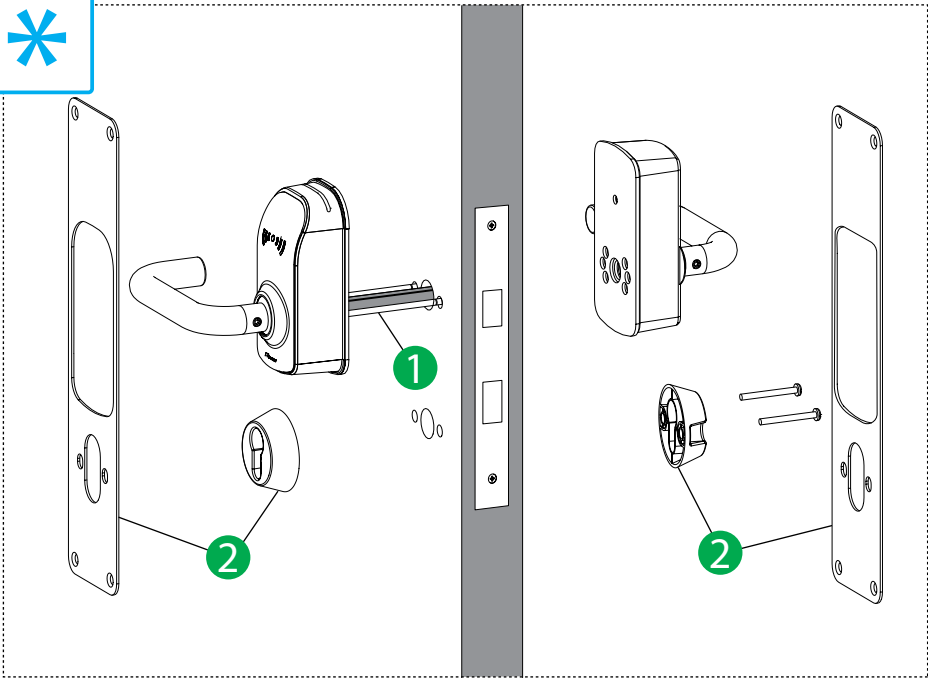


1



900-059



50mm-54mm



900-060




57mm-62mm


2




900 - 051




900 - 053



900 - 054





900 - 055



900 - 056



* <http://paxton.info/3560>

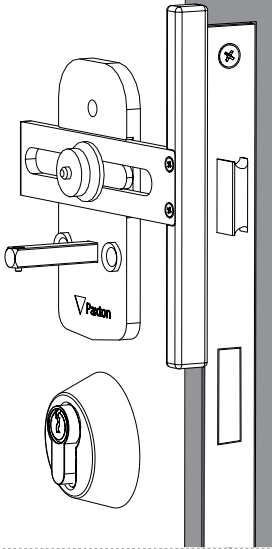



+44 (0)1273 811011
 support@paxton.co.uk
 paxton.support



877.438.7298
 supportUS@paxton-access.com
 usapaxton.support



+31 (0)76 3333 999
 support@paxton-benelux.com
 paxton.benelux.support



+32 (0) 78485147
 support@paxton-benelux.com
 paxton.benelux.support



+49 (0) 251 2080 6900
 verkauf@paxton-gmbh.de
 paxton.gmbh.support



+33 (0)1 57 32 93 56
 support@paxtonaccess.fr
 paxton.support



+27 (0) 21 4276691
 support@paxtonaccess.co.za
 paxton.support



8000 3570 3783
 support@paxtonaccess.ae
 paxton.support



+52 55 5351 3667
 soporte@paxton-access.com
 paxton.soporte



+57 1508 8198
 soporte@paxton-access.com
 paxton.soporte



+44 (0)1273 811011
 support@paxton.co.uk
 paxton.support



Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of the Directive 2014/53/EU. <http://paxton.info/4867>

The full declaration of conformity is provided at: <http://paxton.info/3910>

These products are not suitable for retail sale. All warranties are invalid if these products are not installed by a competent person.

PaxLock Pro is only EN179 compliant when used with the Paxton Access EN179 accessory kit (sales code 901-015).

The PaxLock is EN1634-1:2008 compliant up to FD60 Fire resistance.

Compliance is subject to the following conditions:

Paxlock shall be installed in conjunction with an appropriately rated mortice lock case. The fire test and assessment reports are available on request. For further details on the conditions of compliance Contact details are provided at: <http://paxton.info/596>



<http://paxton.info/1606>



Made in the UK

