



Electronics Ltd

Application-Switch mode Power Supply
suitable for systems that require battery backup,
Fire alarm systems (BS5839) & Installations that
require monitoring of the Mains & Battery.

*Pelham Works
Pelham Street
Wolverhampton
WV3 0BJ*

Tel: (01902) 656667


Web: www.rgl.co

Email: info@rgl.co



**Part Number: 2401SM-2MP (1 Amp)
2402SM-2MP (2 Amp)**

- 27.6 Volt DC Regulated output switchmode. Full current to stated load
- Battery current limiting circuit
- Over-discharge protection
- Mains transient protection
- Current limiting protection
- Short circuit protection
- Over voltage protection
- LED Diagnostics
- Maximum Battery capacity up to 2 x 9Ah only
- Voltage free terminals for:
 - Mains Fail
 - Battery Missing/Weak
 - Power Output Fault

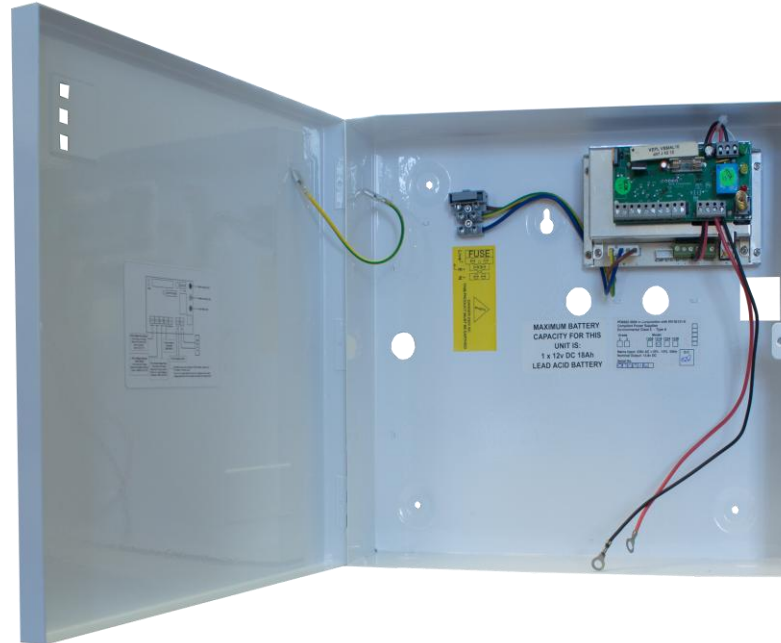

CE APPROVED
EMC TO EN55011
RFI TO EN55022

- Mild steel construction
- White powder coated finish
- Hinged style box
- Wiring Instructions inside product
- More efficient and environmentally friendly
- Top, bottom and Rear cable entry
- Front Tamper

Dimensions

Size: 340x310x80 (mm)

Weight: 3kg