


# ATS1500A-IP-MM-NK

Kit ATS1500A-IP-MM including ATS1110A Keypad

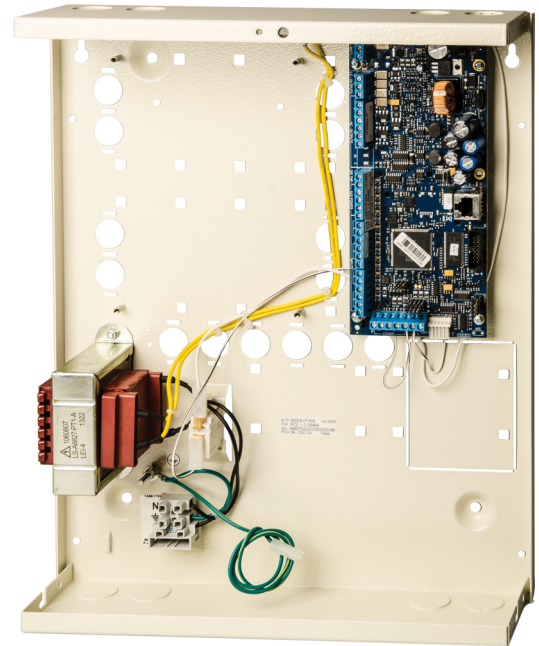

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Security grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: each user his own language
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP & DNS support
- Auto Arming - Schedules - Times Outputs

# ATS1500A-IP-MM-NK

## Kit ATS1500A-IP-MM including ATS1110A Keypad

### Technische specificaties

#### System

Product type	Toegangscontrole
Panel type	Hybrid
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54

#### Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

#### Outputs

No. of outputs	128
No. of onboard outputs	5

#### Area

No. of areas	4
--------------	---

#### User/Cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	50
Max. no. of PIN codes	50

#### Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

#### Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

#### Event log

Alarm event log	14500
Access event log	10000

#### Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	950 mA at 13.8 V $\pm$ 0.2 V
Max aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1

#### Physical

Physical dimensions	315 x 388 x 85 mm
Material	Steel (painted)
Housing	Medium Metal

#### Environmental

Operating temperature	-10 to +55°C
Relative humidity	0.95
Environmental Class	Class II, indoor
IP rating	30

#### Standards & regulation

EN50131 Grade	Grade 3, with tamper kit
Compliance	CE



Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar [be.firesecurityproducts.com](http://be.firesecurityproducts.com) of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 19 April 2022 - 12:46