


ATS3500A-IP-MM-HK

Advisor Advanced ATS3500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 128 zones, 8 areas, 2A PSU. Wired or wireless (hybrid) using plug-

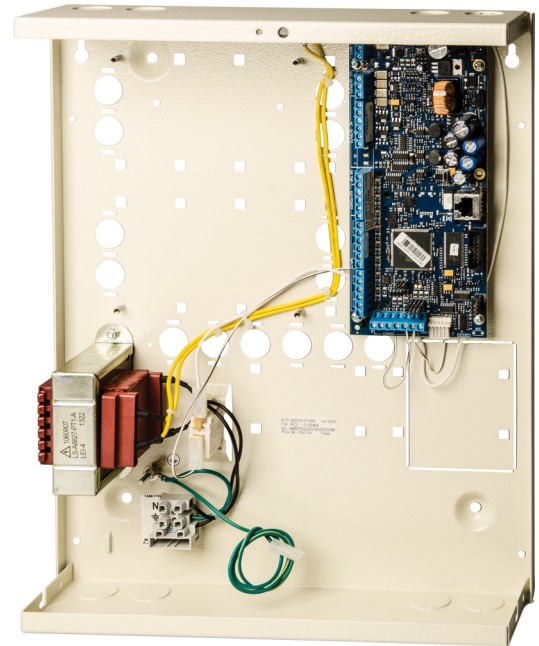

Details

- 8 onboard zone inputs
- Max 128 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 8 areas
- Up to 200 users
- EN50131 Security grade 3
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: each user his own language
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver / GPRS optional
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP address & DNS support
- Auto Arming - Schedules - Timed outputs

ATS3500A-IP-MM-HK

Advisor Advanced ATS3500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 128 zones, 8 areas, 2A PSU. Wired or wireless (hybrid) using plug-

Technische specificaties

System

Product type	Toegangscontrole
Panel type	Hybrid
No. of keypads / readers	16
Data Gathering Panels (DGP)	15
No. of alarm groups	64
Specified cable	WCAT52 / WCAT54

Inputs

Max no. of inputs	128
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	8
--------------	---

User/Cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	200
Max. no. of PIN codes	200

Access control

Standard doors on control panel	8
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	48

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50/60 Hz
Mainboard current consumption	150 mA
Max system current	1950 mA at 13.8 V
Max aux power current	1350 mA
Auto-reset fuses	5
Glass break fuses	1

Physical

Physical dimensions	315 x 388 x 85 mm
Material	Steel (painted)
Housing	Medium Metal

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP30

Standards & regulation

EN50131 Grade	Grade 3
Compliance	CE
Certification	CE



Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 19 April 2022 - 12:46