


ATS624

4 relay output expander, plug-in, Advisor Advanced

Four relay plug-in output expander

The ATS624 offers a four relay output expansion to Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB.

The ATS624 provides for four outputs available through screw terminals, all supporting a 1A relay. In addition it provides an extension to connect four more relays using the ATS1810 four 4-way relay cards. The output function is defined through the output configuration in the main control panel.

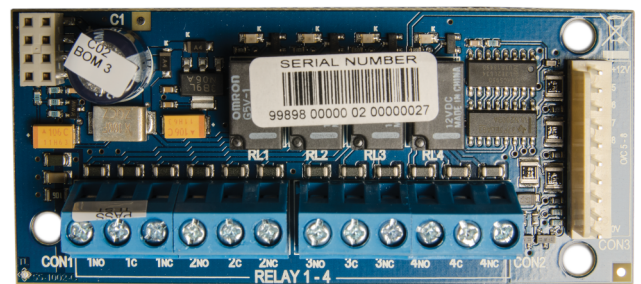

Details

- 4 outputs
- Relays
- 1A, NC/NO/C
- 4 additional Relay outputs through ATS1810
- Plug-in to Advisor Advanced panels

ATS624

4 relay output expander, plug-in, Advisor Advanced

Technische specificaties

General

Expander type	Output expander
Product line	Advisor Advanced
Connection type	Plug-in
Max. distance from panel	Located on Advisor Advanced PCB
Max. per panel	1

Outputs

Total	8
Onboard	4
Expandable	4 (1x ATS1810)
Type of outputs	Relays
Relays	SPDT

Electrical

Operating voltage	10.5 to 13.8 VDC
Current consumption	50 mA

Physical

Physical dimensions	90 x 40 mm
---------------------	------------

Environmental

Operating temperature	0 to +50°C
Relative humidity	95% noncondensing
Environment	EN50130-5 ; Class II - Indoor (General)

Standards & regulation

Compliancy	CE
Certification	CE, EN50131 Grade 3, VdS



Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 23 November 2021 - 22:15